

Care instructions:

Wipe mesh clean with mild soap and warm water

Common Sense Caution:

While our poly coated mesh is tough and durable, some dogs become very anxious in vehicles and fabric material cannot be guaranteed to withstand aggressive clawing and chewing.

Do not use this product if it is torn or damaged

The dog barrier only prevents dogs from entering the front of the vehicle through the center. Smaller dogs may be able to enter the front through the sides of the vehicle where there is no barrier. You may want to invest in a tether to help secure your dog as well.

Dog Barrier Assembly & Installation HR-7227


Components:

2 - Long "J" shaped rods with foam pad bumpers (A)

2 - Short "J" shaped rods with foam bumpers (B)

4 - Webbed straps with buckles - 2 long, 2 short

1 - Mesh panel with hook-and-loop channels, attachment cords w/ cord-locks with cord locks

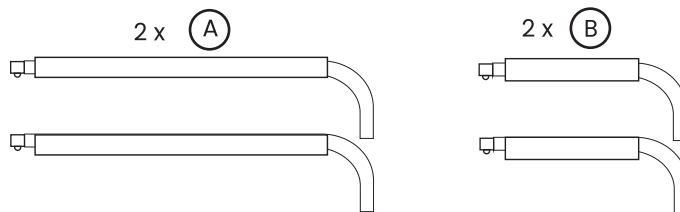

Assembling Frame:

1. Using a Rod A, press the spring-lock button down, insert end into curved end of a Rod B until the lock clicks (figure 1)
2. Repeat with the remaining rods to form a rectangle (figure 2)
3. Lightly pull on the 4 frame joints to insure rods are secure

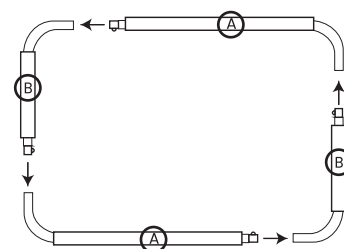


figure 1

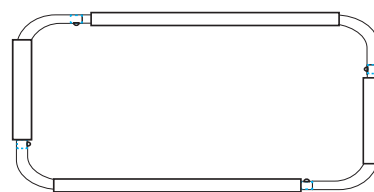


figure 2

Assembling Barrier:

4. Lay the mesh panel on a flat surface with the hook-and-loop side channels open and facing up (figure 3)

5. Place the metal frame on the mesh panel so that the foam pads are centered within the mesh panel channels

6. Wrap the mesh channels around the foam pads and secure the hook-and-loop closures (figure 4)

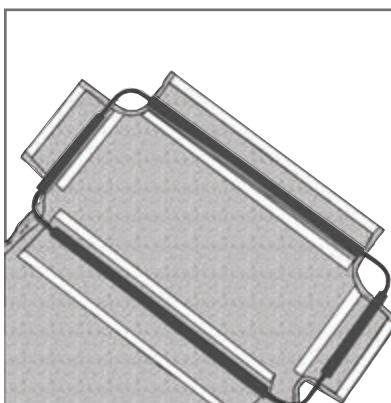


figure 3

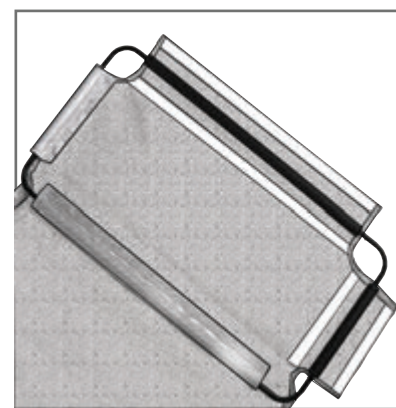


figure 4

Installing the Dog Barrier continued:

4. Thread the cord around track/base and thread back through the 2nd hold in the cord lock (figure 11)



figure 11

5. Pull snug and release cord lock button

6. Repeat on the drivers side seat (figure 12)

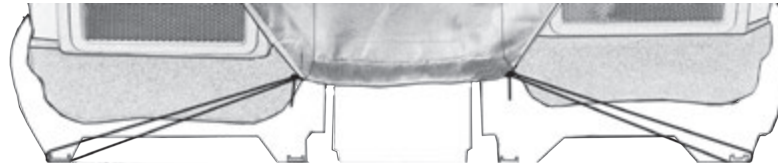


figure 12

Method B: **Attaching around the middle of the front seats**

1. Take one end of the hanging cord and from the back of the passenger front seat, tuck it through the crack of the seat and pull through to the front

2. Wrap cord around outside the seatback frame closest to the door - avoiding the seat belt (figure 13)

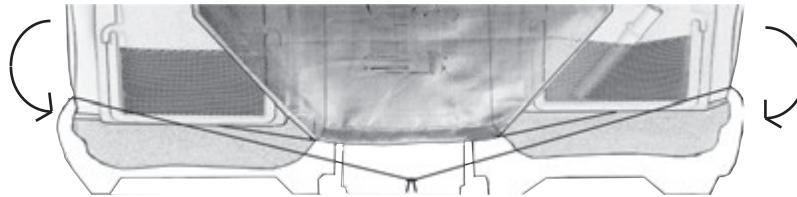


figure 13

3. Thread end of the cord through 1 hold of the cord lock and let the cord hang loose (figure 14)



figure 14

4. Repeat on the drivers seat with the other cord

5. Connect cords through the cord-lock (figure 15)



figure 15

6. Snug tight to secure

7. Tie loose ends together

Installing the Dog Barrier:

Note: Steps 5 through 9 are easiest with 2 people

1. Thread 1 long strap vertically around the headrest cushion, do not thread strap through buckle yet, let hang loosely (figure 5)



figure 5

2. Repeat with 2nd long strap on other headrest

3. Wrap a short strap horizontally around headrest post(s), do not thread strap through buckle yet, let hang loosely (figure 6)



figure 6

4. Repeat with 2nd short strap on other headrest

5. Hold the assembled barrier against the backs of the front seats with the tapered section at the bottom. Ensure hook-and-loop channel side of frame is facing the front of the car

6. Slide vertical strap through top corner of dog barrier frame, insert strap through buckle and snug secure (figure 7)



figure 7

7. Repeat on the other headrest

8. Thread the horizontal strap through bottom corner of the dog barrier frame just below the foam, insert strap through buckle and snug secure (figure 8)



figure 8

9. Repeat on other side

10. Once all 4 straps are installed, center and re-adjust straps as needed

11. Use the bottom cord attachment to secure the barrier by using either of the following methods

Method A: **Attaching to seat track or base of seat**

1. Depress button on a cord lock and thread one hanging cord through one hole (figure 9)



figure 9

2. Slide cord lock close to the barrier and release button

3. Look under the rear of the passenger front seat and locate the seat track/base that is closet to the door (figure 10)



figure 10