

File ID: ZS-HR-5628
Product ID: HR-5628-BLK
Instruction booklet for HR-5628
Print size: 11" h x 17" w
Final size: 11" h x 8" w
Paper stock: 128 g white
Printed 2 sided
Colors: Black

Print the 2 pages back to back
Fold in 1/2 with the Large High Road logo
on the front and the Division of Talus on the back

Components:

2 - 32" long "J" shaped rods with foam pad bumpers (A)

2 - 16" long "J" shaped rods with foam pad bumpers (B)

4 - rubber "O" rings (C)

1 - mesh panel with hook & loop channels (D)

2 - 29" long straps with buckles (E)

2 - 46" long straps with buckles (F)

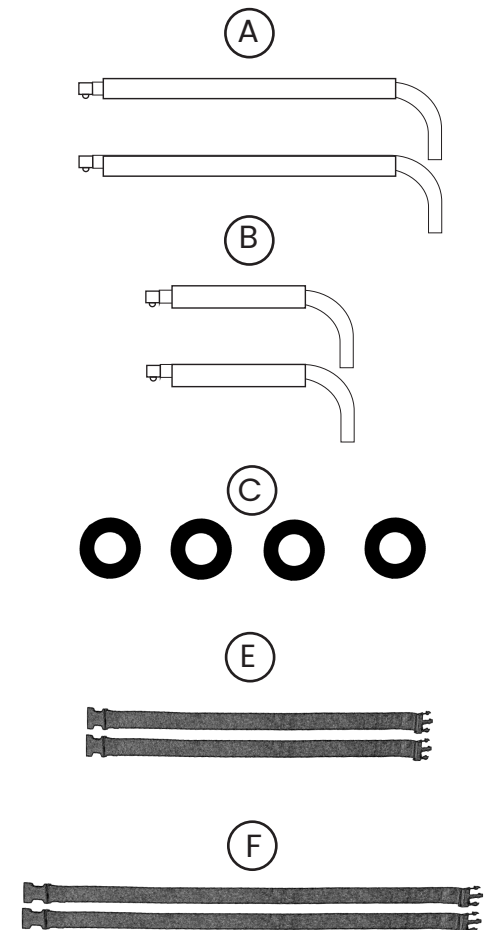
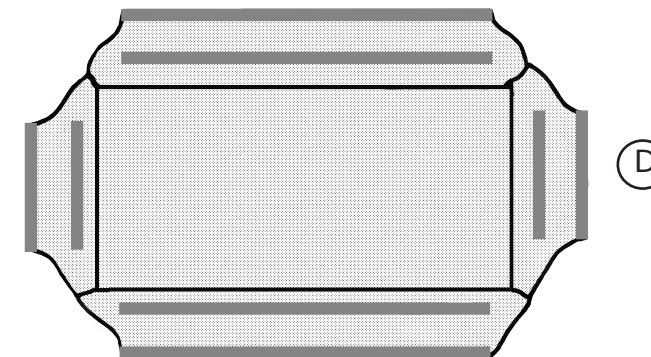


Figure 1




Figure 2





Adding "O" rings to "J" rods

1. Using 1 - "J" rod (A) and 1 "O" ring (C)
2. Position the "O" ring approximately 1.5" from the foam on the corner end of "J" rod (figure 1)
3. Repeat on second "J" rod (A)
4. Using 1 - "J" rod (B) and 1 "O" ring (C)
5. Position the "O" ring approximately 1.5" from the corner of the shortest end of the "J" rod with the hole in it (figure 2)



Assembling the frame:

1. Using "J" rod (A), press the spring-lock button down, and insert into curved end of "J" rod (B) until the lock clicks (figure 3)
- 2) Repeat with the remaining "J" rods to form a rectangle (figure 4)
3. Lightly pull on the 4 frame joints to insure rods are secure

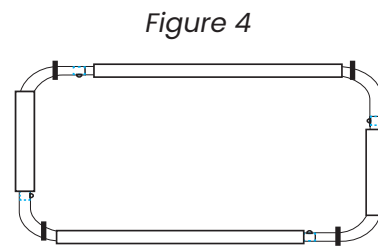


Assembling the shelf:

1. Lay the mesh panel (D) on a flat surface with the hook & loop side channels open and facing up (figure 5)
2. Place the metal frame on the mesh panel so that the foam pads are centered within the mesh panel channels
3. Wrap the mesh channels around the foam pads and secure the hook & loop closures (figure 6), adjust as needed

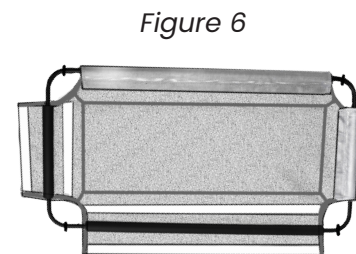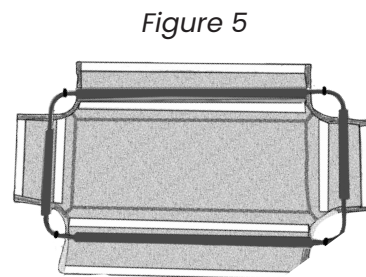

Attaching the straps to the frame

1. With the mesh frame facing you, place one of the short straps (E) in between mesh and "O" ring on the back left end of the frame (figure 7)
2. Repeat with the 2nd (E) strap on the back right end of the frame (figure 8)
3. Next take one of the long straps (F) and thread it between the mesh and "O" ring on the front left end of the frame. (figure 9)
4. Repeat with the 2nd (F) strap on the front right end of the frame (figure 10)

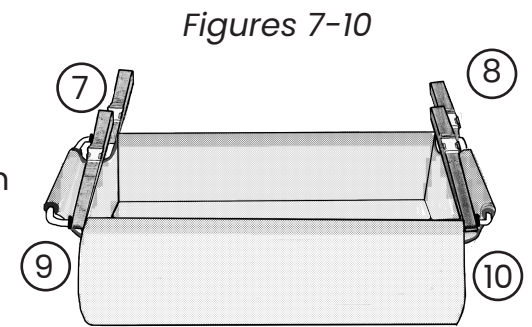

Installing the CargoStash™ Storage Shelf

Note: This works best with 2 people

Now that your frame shelf has been assembled it's time to install it on the back of the seat

1. With one person on each side of the car, place the Cargo Storage Shelf next to the back of the seats with the shortest straps closest to the seat.
2. Wrap straps (E) around the inside post of the left and right headrest and buckle to secure.
3. Take straps (F) and wrap around either the inside post or the exterior post of your left and right headrest depending on your preference. Either way works.
4. Adjust all straps to desired height and level

Caution:

Do not use this product if it is torn or damaged

Do not overload - maximum weight allowance is 20 pounds

Care instructions

Wipe mesh clean with mild soap and warm water

